


NOTES:


1. PIT LID AND FRAME TO BE TERRA FIRMA TYPE OR APPROVED EQUIVALENT TO MP231.
2. IN NATURE STRIPS PIT LIDS TO BE KHAKI GREEN. IN NATURAL COLOUR CONCRETE PAVING PIT LIDS TO BE STORM GREY. IN OTHER PAVED AREAS COLOUR OF PIT LIDS SHALL BE MATCHED TO COLOUR OF PROPOSED FINISHED SURFACE. CONTACT LID MANUFACTURER TO ARRANGE SUITABLE CUSTOM COLOUR MATCH.
3. IN AREAS OTHER THAN FREE FLOWING SAND WHERE A.G. LINES ARE NOT CONNECTED INTO THE PIT, ALLOW 100mmØ A.G. OPENING INTO PIT AT OBVERT LEVEL OF INLET PIPES. BACKFILL PIPELINE FOR 500mm BACK FROM PIT WITH 20mm SCREENINGS TO TOP OF PIPE AND COVER WITH APPROVED GEOTEXTILE FILTER FABRIC.
4. ALL MEASUREMENTS ARE IN MILLIMETRES.

PIT LID AND FRAME TO MP231
SEE NOTE 1

FOR SETOUT PURPOSES, CENTRE OF PIT CHAMBER TO BE 350mm BEHIND BACK OF KERB

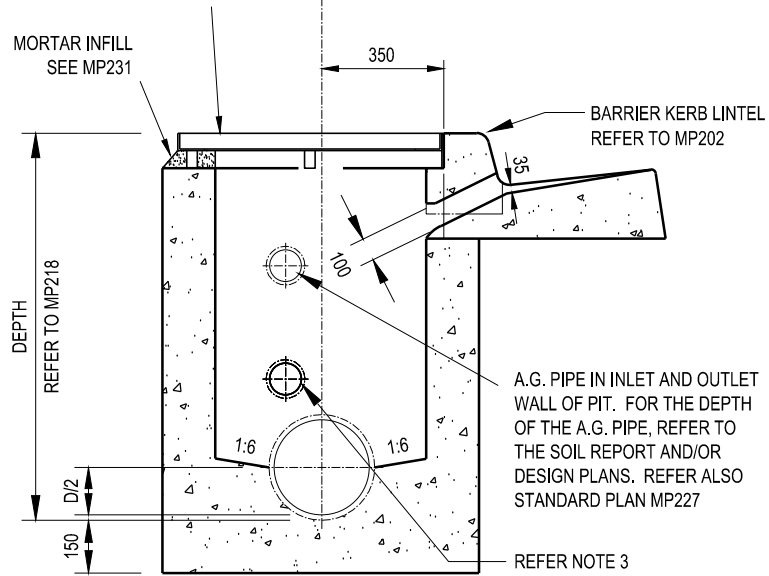

TYPICAL SECTION
SCALE 1:20

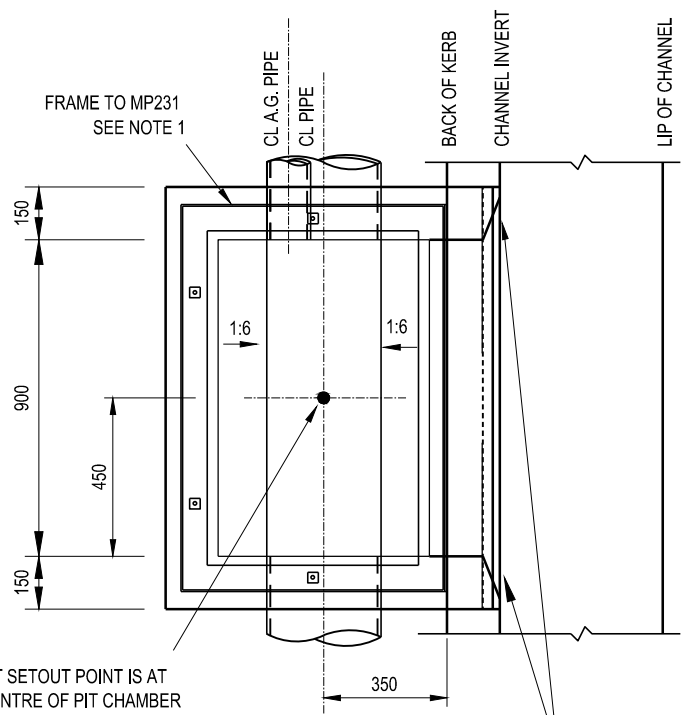

PLAN
SCALE 1:20

INTRODUCE DRAW DOWN 1000mm FROM EITHER SIDE OF THE LINTEL
MAXIMUM DRAW DOWN 35mm



STANDARD PLAN

**SIDE ENTRY PIT
TYPE 1
(BARRIER KERB)**

CERTIFICATION
D. Rotter
DEREK ROTTER - MANAGER PROJECT DELIVERY

DATE OF ISSUE: Sept 2015
SHEET NO.: 1 OF 1

MP201