


NOTES:

1. BRICKS TO BE LAID IN A STRETCHER BOND PATTERN IN ACCORDANCE WITH DESIGN PLANS
2. MINIMUM COMPRESSIVE CONCRETE STRENGTH TO BE 32MPa AFTER 28 DAYS.
3. CHAIRS SHALL SUPPORT THE MESH AT 900mm CENTRES.
4. APPROVED EXPANSION MATERIAL TO BE PLACED BETWEEN BRICKS AND EXISTING OR NEW CONCRETE E.G. KERB AND CHANNEL
5. IN CASES WHERE POOR SUBGRADE CONDITIONS EXIST, CONSIDERATION TO BE GIVEN TO SUBGRADE STABILISATION OR REPLACEMENT

BRICK ROAD PAVING ON CONCRETE BASE

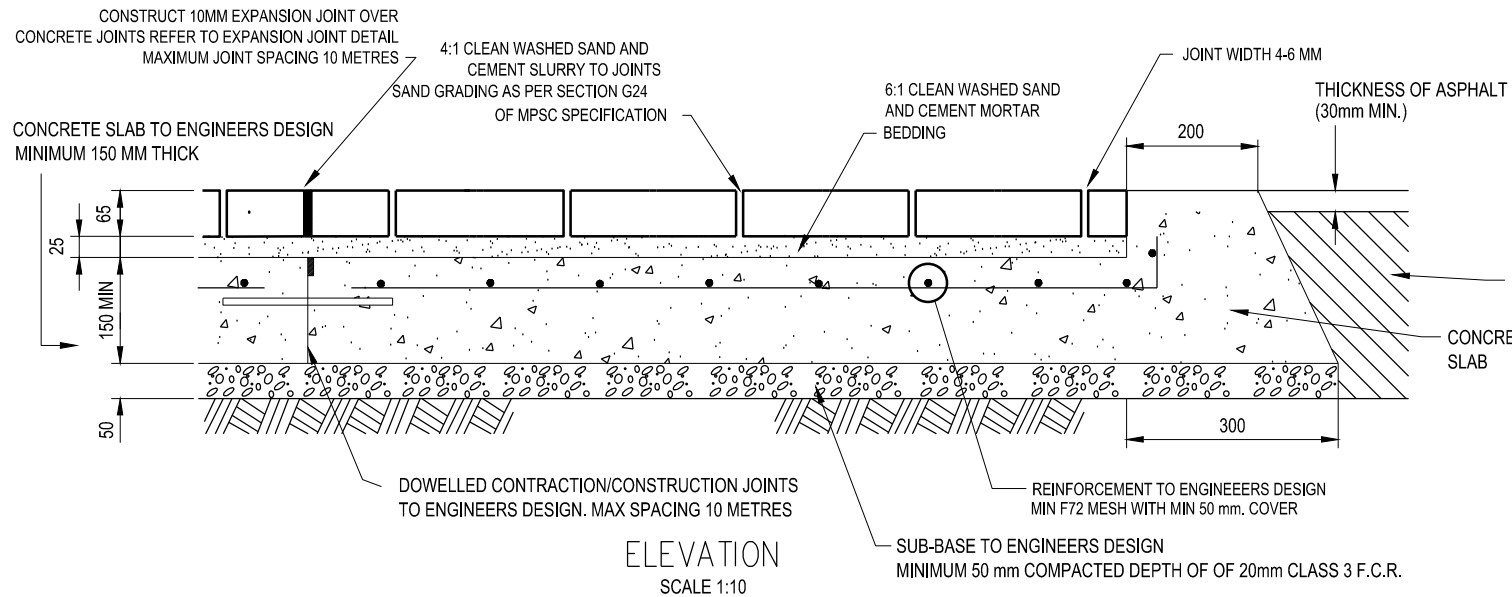

BRICKWORK FILLER "TREMCO THC 901" OR SIMILIAR

50 WIDE X 10 THICK NEOPRENE COMPRESSION SEAL OR EQUIVALENT

EXPANSION JOINT DETAIL
NOT TO SCALE



STANDARD PLAN

BRICK ROAD PAVING ON CONCRETE BASE

CERTIFICATION

D. Rotter
DEREK ROTTER - MANAGER PROJECT DELIVERY

DATE OF ISSUE: Sept 2015

SHEET NO.: 1 OF 1

MP811