


LOCATION OF CULVERT GUIDE POSTS

SCALE 1:50

NOTES:


1. ADDITIONAL GUIDE POSTS (NUMBERED 1 & 2) REQUIRED FOR CULVERTS GREATER THAN 5.0m LONG.
2. THE FOLLOWING TYPES OF GUIDE POSTS ARE AVAILABLE
 - (I) **TIMBER POSTS:** 100x50mm (nominal) CROSS SECTION RED GUM, PAINTED WHITE. SEE DIAGRAM (I).
 - (II) **GALVANISED STEEL POST:** OF APPROVED CROSS SECTION WITH 100x500mm WHITE DELINEATOR PLATE ATTACHED. SEE DIAGRAM (II).
 - (III) **FLEXIBLE POST:** 100mm WIDE WHITE PLASTIC OR FIBREGLASS STRIP APPROVED TYPE, CAPABLE OF SELF-RECOVERY AFTER KNOCKDOWN. SEE DIAGRAM (III).
3. FOR DETAILS OF GUIDE POST SPACING AND SPECIAL TREATMENTS AT BRIDGES AND CULVERTS. REFER TRAFFIC ENGINEERING MANUAL VOL 2 CHAPTER 23.1 AVAILABLE ON VICROADS WEBSITE. CHAPTER 23.2 PROVIDES DETAILS OF DELINEATORS.
4. THE STANDARD DELINEATOR IS THE 80mm DIA. CIRCULAR CORNER-CUBE TYPE, RED OR WHITE, CONFORMING WITH THE TYPE "A" DELINEATOR SPECIFIED IN AS 1906, PART 2.
5. WHERE SPECIFIED ON THE DRAWING, SHEETING TYPE DELINEATORS CAN BE USED IN PLACE OF THE STANDARD DELINEATORS. THE SHEETING SHALL HAVE A TOTAL MINIMUM REFLECTIVE OUTPUT EQUIVALENT TO 1000mm OF CLASS 1A RETROREFLECTIVE MATERIAL AS DEFINED IN AS/NZS 1906 PART 1. THE WIDTH OF REFLECTIVE MATERIAL SHALL BE 40mm MINIMUM. ONLY ONE TYPE OF DELINEATOR SHALL BE USED AT ANY ONE LOCATION.

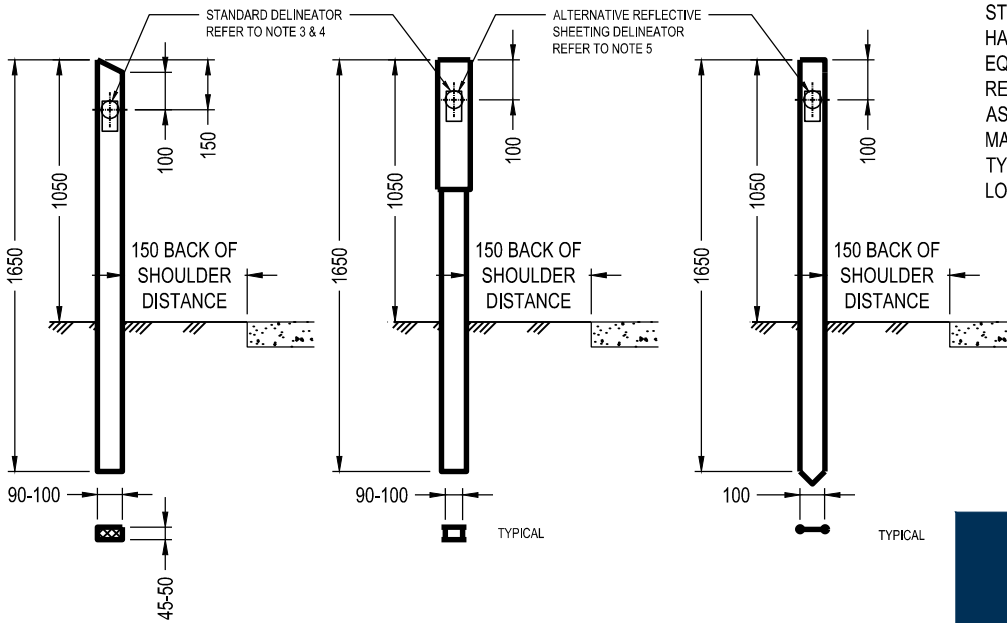

(I) **TIMBER POST**
NOT TO SCALE

(II) **GALV. STEEL POST**
NOT TO SCALE

(III) **FLEXIBLE POST**
NOT TO SCALE

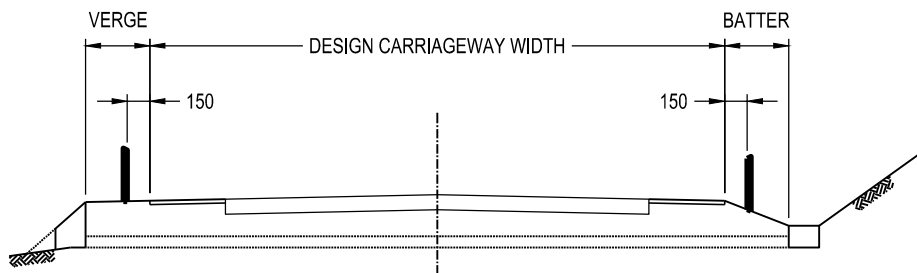

LATERAL LOCATION OF GUIDE POSTS

SCALE 1:50

**MORNINGTON
PENINSULA**
Shire

STANDARD PLAN
STANDARD TIMBER GUIDE POST

[Signature]
MANAGER - INFRASTRUCTURE PROJECTS

DATE OF ISSUE 10/01/2025
SHEET NO 1 OF 1

MP809