


STANDARD BATTER TREATMENT

NOT TO SCALE

BATTERS AND BERM TO BE PREPARED WITH APPROVED LOAM WON FROM STOCKPILE ON SITE OR IMPORTED, TO A DEPTH OF 75mm, LEVELLED, RAKED, FERTILISED AND SOWN WITH AN APPROVED SEED MIXTURE ALL AS SPECIFIED

NOTES:


- 1 REFER TO MP306 FOR RETAINING WALL GUIDELINES.
- 2 RETAINING WALLS TO MORNINGTON PENINSULA STANDARD PLAN MP801 TO BE USED WHERE:
 - i. BATTERS AT MAXIMUM GRADE WILL HAVE AN IMPACT ON SUBSTANTIAL VEGETATION AND MATURE TREES.
 - ii. BATTERS AT MAXIMUM GRADE WILL CONFLICT WITH MAJOR SERVICES.
- 3 WHERE RETAINING WALL HEIGHT EXCEEDS 800mm ABOVE KERB LEVEL THEN USE RETAINING WALLS AS DETAILED BY THE COUNCIL'S PROJECT DESIGNER.
- 4 ALL MEASUREMENTS ARE IN MILLIMETRES.

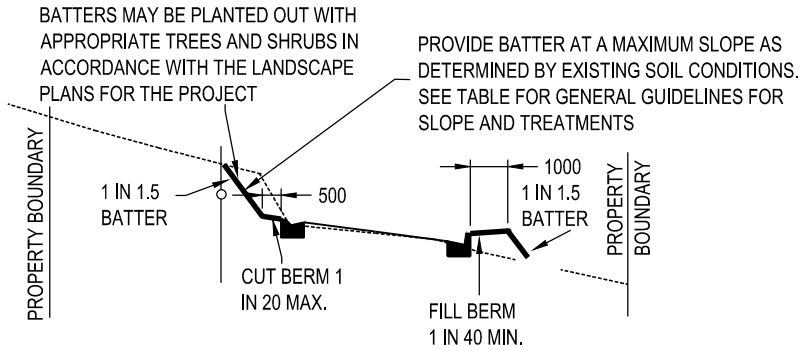

ALTERNATE BATTER TREATMENT

NOT TO SCALE
FOR SLOPES 1 IN 1.5 OR GREATER

NOTE: AS SOIL CONDITIONS VARY IN STABILITY, COUNCIL'S CONSTRUCTION ENGINEER MAY DETERMINE THE MOST SUITABLE SLOPE ON SITE. THE TABLE BELOW IS A GENERAL GUIDE TO ADOPT AS SUITABLE BATTER TREATMENTS.



BATTER TREATMENT GUIDELINES

SOIL TYPE	MAXIMUM SLOPE	BATTER TREATMENT
SAND	1 IN 3	STANDARD BATTER TREATMENT
SAND	1 IN 1.5	THATCHED BATTER TREATMENT AS PER STANDARD MP802
CLAY	1 IN 1	THATCHED BATTER TREATMENT AS PER STANDARD MP802
ROCK	4 IN 1	NO SPECIAL TREATMENT REQUIRED



MORNINGTON
PENINSULA
Shire

STANDARD PLAN TYPICAL BATTER TREATMENTS

MANAGER - INFRASTRUCTURE PROJECTS

DATE OF ISSUE
SHEET NO

05/12/2024
1 OF 1

MP308