



NOTES:

- 1 FOR BEDDING, SEE CLAUSE F4 OF THE MORNINGTON PENINSULA SHIRE SPECIFICATION.
Link: www.mornpen.vic.gov.au/Building-Planning/Engineering/Construction-of-Roads-Drains
- 2 FOR OPEN INVERT CHANNEL USE CONCRETE CEMENT CONTENT MINIMUM OF 32MPA (320kg PER CUBIC METRE).
- 3 SMOOTH TROWEL FINISH
- 4 TOOL JOINTS ONLY, NO SAW CUTS
- 5 ALL REPLACEMENT OR REINSTATEMENT WORKS MUST BE DOWELLED INTO EXISTING STRIP OR CHANNEL USING N12 BARS AT 450MM LENGTHS, WITH 150MM DRILLED INTO EXISTING KERB.
- 6 ALL MEASUREMENTS ARE IN MILLIMETRES.

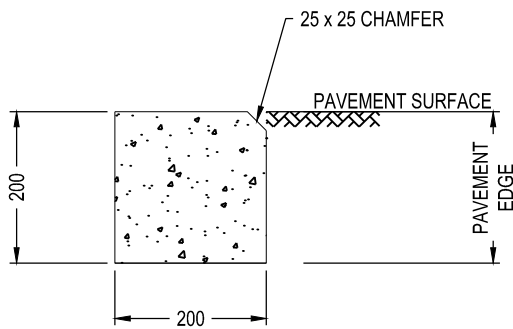

MK1: CONCRETE EDGE STRIP
SCALE 1:10

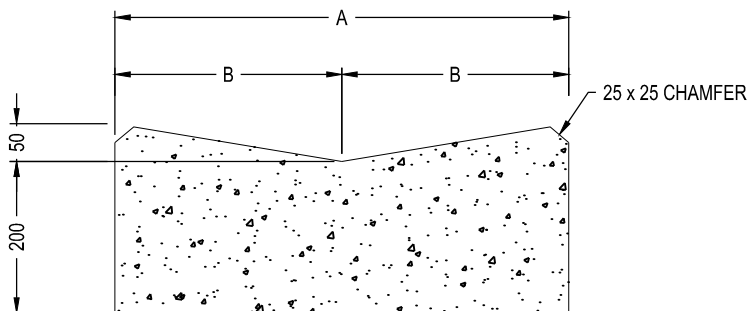

| | A | B |
|--------|-----|-----|
| TYPE 1 | 600 | 300 |
| TYPE 2 | 850 | 425 |

MK2: OPEN INVERT CHANNEL
SCALE 1:10



**MORNINGTON
PENINSULA**
Shire

STANDARD PLAN
MOUNTABLE KERB PROFILES

[Signature]
MANAGER - INFRASTRUCTURE PROJECTS

DATE OF ISSUE 05/12/2024
SHEET NO 1 OF 1

MP104