


NOTES:

1. THIS STANDARD IS TO DEFINE THE LOCATION OF SERVICE AUTHORITY ASSETS INSTALLED LONGITUDINALLY WITHIN A ROAD PAVEMENT
2. TO BE READ IN CONJUNCTION WITH MP602 AND THE SPECIFICATION FOR INSTALLATIONS AND REINSTATEMENTS WITHIN ROAD RESERVES.
3. EXISTING PAVEMENT TO BE SAWCUT 150mm BEYOND THE EDGE OF TRENCH UPON REINSTATEMENT OF WEARING COURSE, CRACK SEAL JOINT WITH EMULSION AND 5mm GRIT TO MATCH EXISTING WEARING COURSE COLOUR.

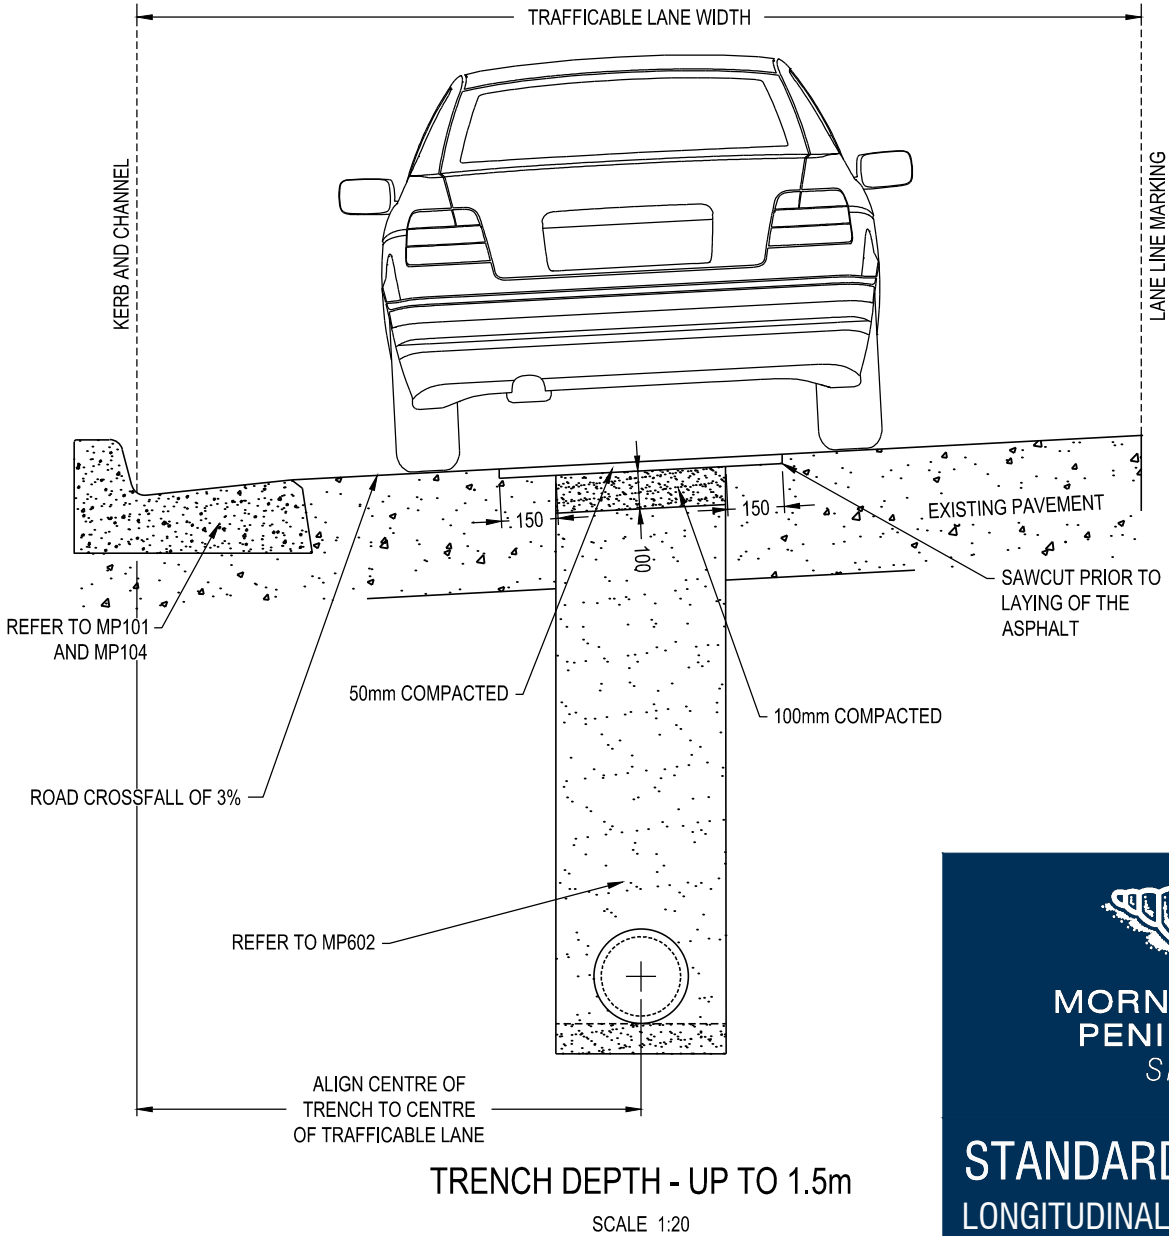

MORNINGTON  
PENINSULA  
*Shire*

STANDARD PLAN  
LONGITUDINAL SERVICE  
INSTALLATIONS IN ROAD  
PAVEMENT

MANAGER - INFRASTRUCTURE PROJECTS

DATE OF ISSUE  
SHEET NO

10/01/2025  
1 OF 1

MP603